

Sistem Cor-2300



Sistem Cor-2300

Coeficient de transfer termic

Uw de la 2,0 (W/m²K)

Consultati tipologia, dimensiunea si sticla

Izolarea acustica

Spatiu maxim pentru vitrare: 26 mm.

Izolarea acustica maxima **Rw=39 dBA**

Finisaje

Posibilitate bicolor

Culori vopsire (RAL, pestrit si texturat)

Vopsire imitatie lemn

Vopsire antibacteriana

Anodizat

Categorii realizate pe bancul de proba

Permeabilitate la aer
(EN 12207:2000): Clasa 4

Etanseitate la apa
(EN 12208:2000): Clasa 9A

Rezistenta la vant
(EN 12210:2000): Clasa C5
Test de referinta 1,10 x 1,20 m. 2 foi

Posibilitatea folosirii baghetelor cu estetica dreapta sau rotunjita.

Prezinta posibilitatea de a incorpora feronerie cu balamale ascunse.

Posibilitate de a incorpora feronerie de siguranta Evo Security.



Sectiuni



Toc 40 mm.

Foaie 48 mm.


Grosime profil

Fereastra 1,3 mm.

Usa 1,4 mm.



Posibilitati de deschidere

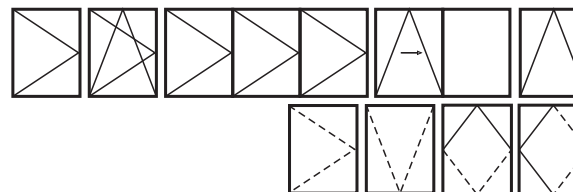

Deschidere interioara: batanta, oscilo-batanta, plianta, oscilo-paralela si oscilanta.

Deschidere exteriora: batanta, proiectanta-glisanta, pivotanta cu prindere orizontala sau verticala.

Dimensiuni maxime/foaie

Latime(L) = 1.500 mm.

Inaltime (H) = 2.400 mm.

Consultati greutate si dimensiunile maxime conform tipologiei.

Greutate maxima/foaie

120 Kg.